
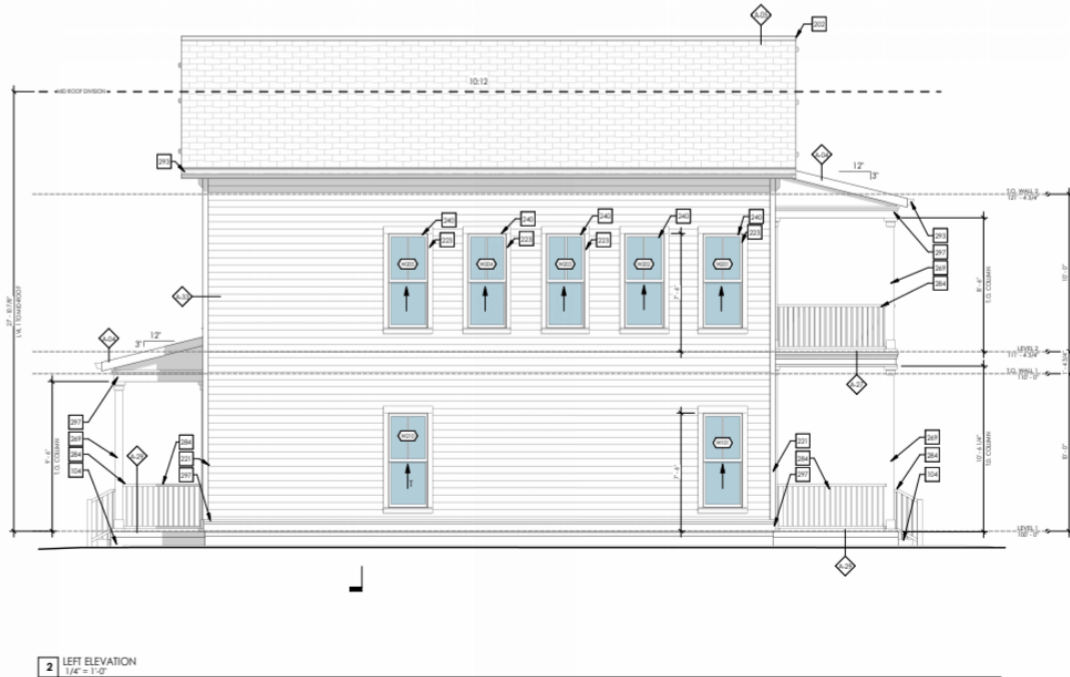
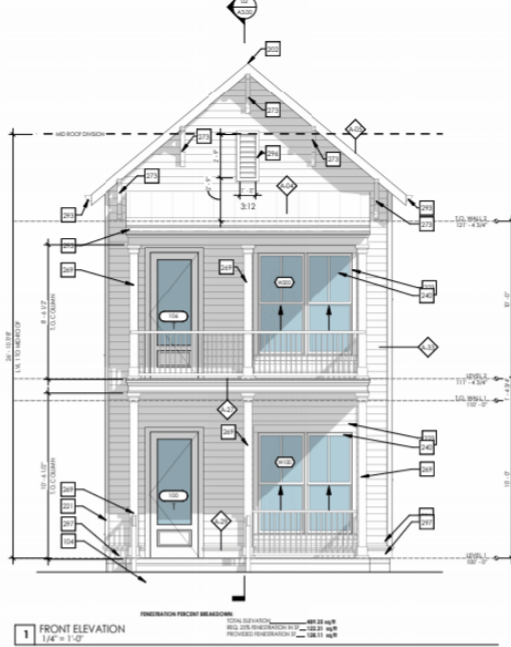
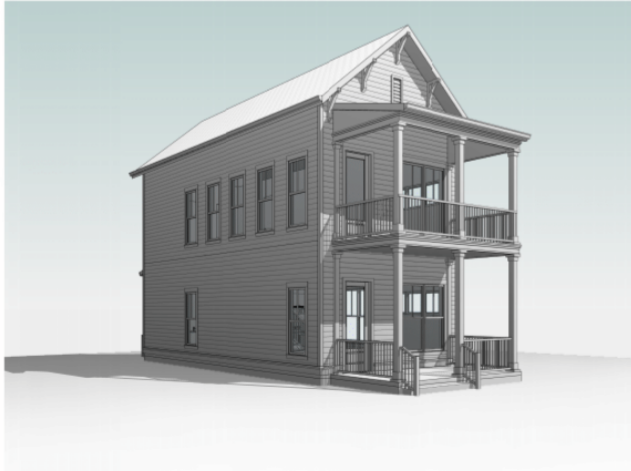


WINDOW SCHEDULE																	
MARK	TYPE	LEVEL	Head Height	DIMENSIONS		INTERIOR TRIM					EXTERIOR TRIM					NOTE	
				WIDTH	HEIGHT	MTL	HEAD CASE HT	SIDE CASE W	STOCK APRON	FINISH	MTL	HEAD CASE HT	SIDE CASE W	SEL APRON	FINISH	SCREWS (Y/N)	Comments
LEVEL 1																	
W100	B	LEVEL 1	8'-0"	6'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		
W101	A	LEVEL 1	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W102	B	LEVEL 1	8'-0"	6'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		1
W103	H	LEVEL 1	8'-0"	5'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		1
W104	H	LEVEL 1	8'-0"	5'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		1
W105	D	LEVEL 1	7'-6"	2'-6"	2'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	N		1
W210	A	LEVEL 1	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
LEVEL 2																	
W200	B	LEVEL 2	8'-0"	6'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		0
W201	A	LEVEL 2	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W202	A	LEVEL 2	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W203	A	LEVEL 2	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W204	A	LEVEL 2	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W205	A	LEVEL 2	7'-6"	2'-6"	6'-0"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-7 1/4"	PL WL	N		1
W206	B	LEVEL 2	8'-0"	6'-0"	6'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	1		1
W207	D	LEVEL 2	7'-6"	2'-6"	2'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	N		1
W208	B	LEVEL 2	7'-6"	2'-6"	2'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	N		1
W209	D	LEVEL 2	7'-6"	2'-6"	2'-6"	WD	0'-3 1/2"	0'-3 1/2"	PL WL	FIBER CEMENT	0'-3 1/2"	0'-3 1/2"	0'-5 1/2"	PL WL	N		0

WINDOW TYPES

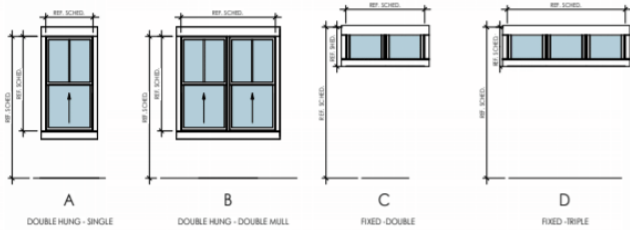

KEYED NOTES

- 104 FORMED CONCRETE STAIRS
- 202 CONTRAJOIS ROOF VENT
- 201 1X4 PAINTED HARDBOARD CORNER
- 223 1X4 PAINTED HARDBOARD WINDOW/DOOR CASING
- 240 1X4 PAINTED HARDBOARD HORIZONTAL TRIM
- 249 POST & RAIL INDICATED, WRAPPED W/ PAINTED HARDBOARD, REF. DETAILS
- 273 4X4 PAINTED/STAINED WOOD KNEE BRACE, REF. DETAILS
- 284 WOOD RAILING, REF. DETAILS
- 293 6-STYLE GUTTER, DOWNSPOUT BY CONTRACTOR
- 294 CABLE END VENT
- 297 BUILT UP HISTORIC HARDTRIM BANDING

ASSEMBLIES

- A-04 TYP. METAL ROOF: METAL ROOF PANEL, SELF-ADHERED GRANULATED ROOFING UNDERLAYMENT WR GRACE OR EQUIV, 5/8" SPAN RATED OSB, WOOD ROOF FRAMING BY CONTRACTOR, 8" SPANED OPEN-CELL INSUL. UNDERSIDE OF ROOF DECK
- A-05 TYP. ASPHALT ROOF: CLASS 'A' ASPHALT SHINGLES, 1/4" FELT UNDERLAYMENT, 5/8" SPAN RATED OSB, PRE-ENGINEERED WOOD TRUSSES @ 24" O.C., 12" BLOW-IN INSULATION MIN. R-20 FOR R-30
- A-07 TYP. PORCH FLOOR: 5/4x6" TREX DECK BOARD, TREX 2X10 @ 16" O.C., REF. DETAILS
- A-09 TYP. SLAB PORCH: 4" CONCRETE SLAB W/ 4X6" W.P.M., COVER 90% COMPACTED FILL OR UNDISTURBED SOIL
- A-33 TYP. EXTERIOR WALL: 7" EXPOSURE HARDBOARD LAP SIDING, THREE BUILDING WRAP OR EQUIV, 5/8" OSB SHEATHING, 8-13 KRAFT FACED ECO-BATT INSULATION, 2X4 FRAMING @ 16" O.C., 5/8" GYP. BOARD



PROJECT NAME:
TWO BED COTTAGE

PROJECT LOCATION:
1580 BARNETT SHOALS RD

ISSUE:
CD

DATE:
06.13.2024

REVISION: _____ DATE: _____

DRAWING:
BUILDING ELEVATIONS

SHEET NO.:

A2.00