

Athens-Clarke County Public Utilities Department

2025 Capital Improvements Element

Project
3-320

Project Name

Hampton Park Gravity
Sewer Interceptor

Project Category


Rehabilitation and
Replacement

Project Cost

\$2,100,000

Key Elements

1. Replacement of 3,000 LF of existing sanitary sewer (SS) pipe.
2. Improved sewer flow and reduced maintenance.
3. Improved sewer flow capacity.

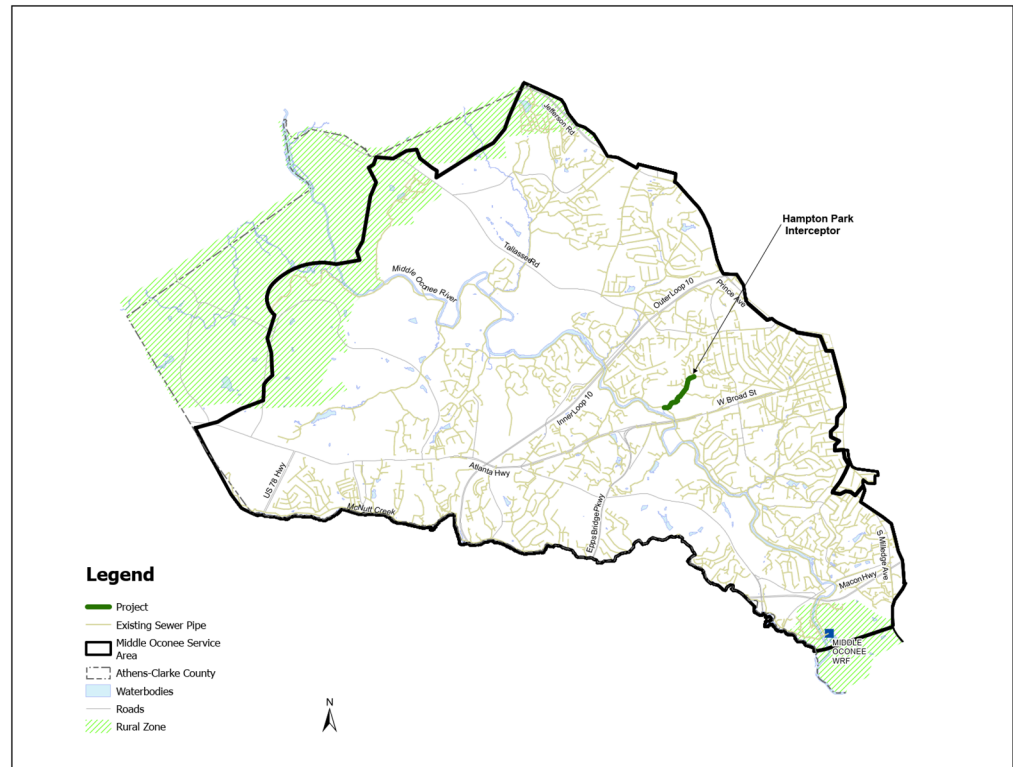

Project Description

This project is the replacement of 3,000 LF of sanitary sewer to address capacity issues within the Middle Oconee WRF sewer basin (sub-basin: LMO-4). Increasing the pipeline size will improve the flow capacity. The proposed pipe replacement includes:

- Replace 1,200 LF of existing SS pipe with 10" diameter SS pipe
- Replace 900 LF of existing SS pipe with 15" diameter SS pipe
- Replace 900 LF of existing 12" diameter SS pipe for slope improvements